


INDEX	P-131775
REV. LEVEL	0
SHEET	1 OF 1

TOSHIBA/HOUSTON
EQP III "XS" & "841"

TOTALLY-ENCLOSED FAN-COOLED
HORIZONTAL FOOT-MOUNTED
PREMIUM EFFICIENCY SEVERE DUTY

FR.5010UZ/5010US
4-8 POLE

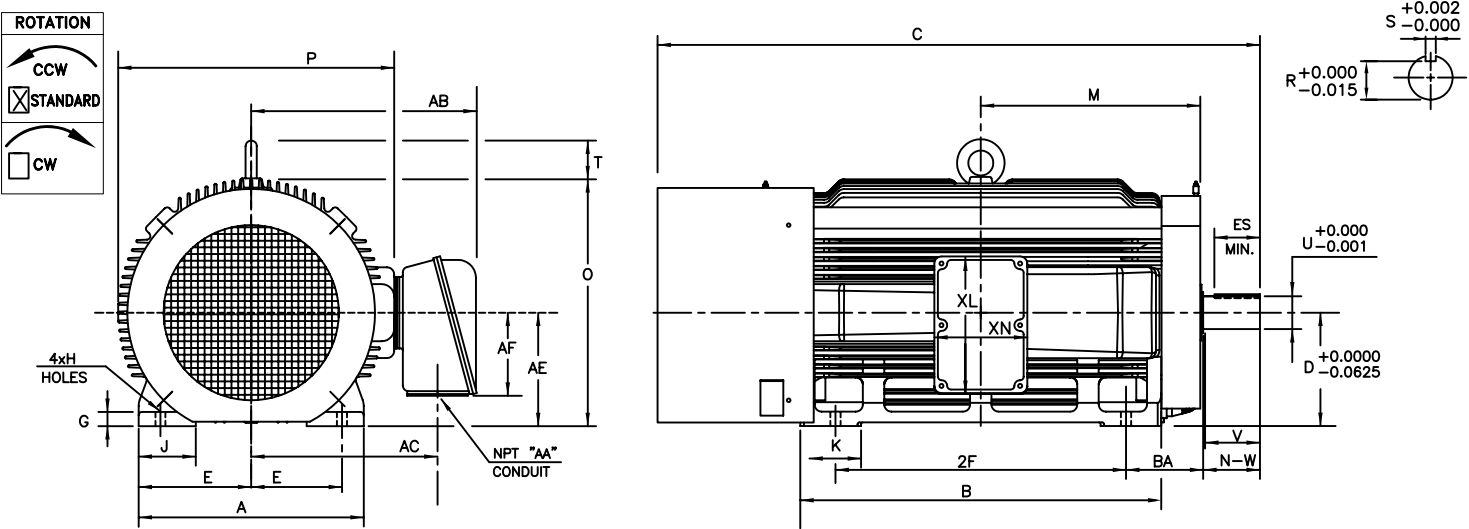

UNITS: INCHES

FRAME SIZE	MOUNTING				CONDUIT BOX							
	E	2F	H	BA	AA	AB	AC	AE	AF	XL	XN	
5010UZ/5010US	10.00	32.0	1.12	8.50	4.00	24.9	20.7	12.5	9.2	15.2	10.2	

FRAME SIZE	MOTOR DIMENSIONS										
	A	B	C	D	G	J	K	M	O	P	T
5010UZ	24.8	39.8	71.7	12.50	1.6	6.3	6.7	24.2	27.2	30.6	4.3
5010US	24.8	39.8	66.4	12.50	1.6	6.3	6.7	24.2	27.2	30.6	4.3

FRAME SIZE	SHAFT EXTENSION			KEY SEAT			BEARINGS		APPROX. WEIGHT
	N-W	V	U	R	S	ES	LS	OS	
5010UZ	11.62	11.38	4.375	3.817	1.000	10.03	NU324C3	6320C3	4650 lbs.
5010US	6.25	6.19	3.625	3.134	0.875	5.03	6320C3	6320C3	4500 lbs.

- NOTES:
- DIMENSION V REPRESENTS LENGTH OF STRAIGHT PART OF SHAFT.
 - CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS AND MAY BE MOUNTED ON OPPOSITE SIDE ON SPECIAL ORDER.
 - "UZ" KEY DIMENSIONS EQUAL S x S x 10.00
"US" KEY DIMENSIONS EQUAL S x S x 5.00
(MOTOR SUPPLIED WITH KEY)
 - MOTOR WEIGHT SHOWN IS MAXIMUM HORSEPOWER IN FRAME.

ALL DATA SUBJECT TO CHANGE WITHOUT NOTICE.
FOR CONSTRUCTION USE ONLY CERTIFIED DATA.

CERTIFIED DATA

CUSTOMER: _____ P.O. NO.: _____ TAG NO.: _____
MOTOR MODEL NO.: _____ TOSHIBA FILE NO.: _____
HP: _____ RPM (SYN.): _____ VOLTAGE: _____ Hz: _____
FRAME SIZE: _____ LOG NO.: _____ LOG REV. LEVEL: _____
REMARKS: _____
PER: _____ ISSUE DATE: _____ SUPERSEDES: _____