


TOSHIBA/HOUSTON  
EQP III "XS" & "841"

TOTALLY-ENCLOSED FAN-COOLED  
HORIZONTAL FOOT-MOUNTED  
PREMIUM EFFICIENCY SEVERE DUTY

Fr. 404T-405T  
Fr. 404TS-405TS

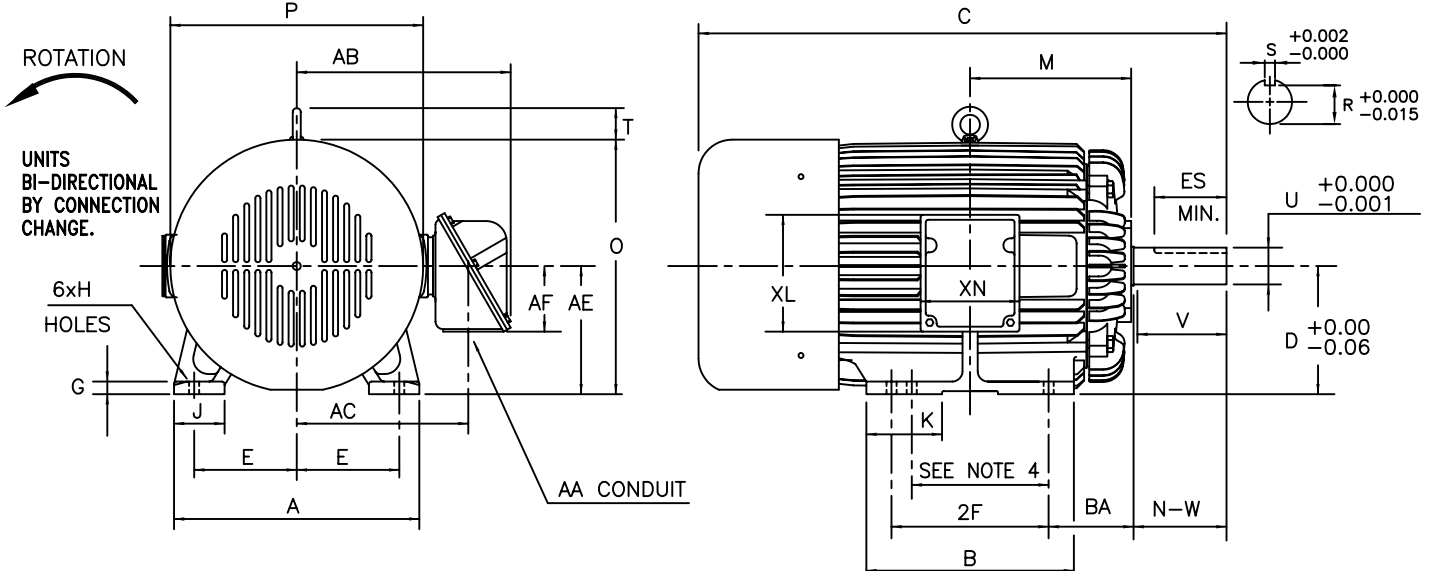

UNITS: INCHES

FRAME SIZE	MOUNTING				CONDUIT BOX						
	E	2F	H	BA	AA	AB	AC	AE	AF	XL	XN
404T/TS	8.00	12.25	0.81	6.62	3.00	16.7	13.4	10.0	5.1	9.1	7.7
405T/TS	8.00	13.75	0.81	6.62	3.00	16.7	13.4	10.0	5.1	9.1	7.7

FRAME SIZE	MOTOR DIMENSIONS										
	A	B	C	D	G	J	K	M	O	P	T
404T/405T	19.1	17.7	41.9	10.00	1.0	4.0	5.9	13.3	19.9	19.7	2.6
404TS/405TS	19.1	17.7	38.9	10.00	1.0	4.0	5.9	13.3	19.9	19.7	2.6

FRAME SIZE	SHAFT EXTENSION			KEY SEAT			BEARINGS		MAXIMUM WEIGHT
	N-W	V	U	R	S	ES	LS	OS	
404T/405T	7.25	7.00	2.875	2.450	0.75	5.65	6317C3	6313C3	1381 lbs.
404TS/405TS	4.25	4.00	2.125	1.845	0.50	2.78	6313C3	6313C3	1381 lbs.

- NOTES:
- DIMENSION V REPRESENTS LENGTH OF STRAIGHT PART OF SHAFT.
  - CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS AND MAY BE MOUNTED ON OPPOSITE SIDE ON SPECIAL ORDER.
  - "T" KEY DIMENSIONS EQUAL S x S x 5.62  
"TS" KEY DIMENSIONS EQUAL S x S x 2.75 (MOTOR SUPPLIED WITH KEY)
  - DIMENSIONS FOR 404T MOUNTING EQUAL (2F) LOCATED IN 404T SIDE VIEW.
  - MOTOR WEIGHT SHOWN IS MAXIMUM HORSEPOWER IN FRAME.

ALL DATA SUBJECT TO CHANGE WITHOUT NOTICE.  
FOR CONSTRUCTION USE ONLY CERTIFIED DATA.

CERTIFIED DATA

CUSTOMER: \_\_\_\_\_ P.O. NO.: \_\_\_\_\_ TAG NO.: \_\_\_\_\_  
 MOTOR MODEL NO.: \_\_\_\_\_ TOSHIBA FILE NO.: \_\_\_\_\_  
 HP: \_\_\_\_\_ RPM (SYN.): \_\_\_\_\_ VOLTAGE: \_\_\_\_\_ Hz: \_\_\_\_\_  
 FRAME SIZE: \_\_\_\_\_ LOG NO.: \_\_\_\_\_ LOG REV. LEVEL: \_\_\_\_\_  
 REMARKS: \_\_\_\_\_  
 PER: \_\_\_\_\_ ISSUE DATE: \_\_\_\_\_ SUPERSEDES: \_\_\_\_\_