


INDEX	MDSL0041-03
REV. LEVEL	4
SHEET	1 OF 1

TOSHIBA/HOUSTON

EXPLOSION PROOF
HORIZONTAL FOOT-MOUNTED

HAZARDOUS LOCATION Fr. 213T-215T
CLASS I GROUP D
CLASS II GROUP E, F, AND G

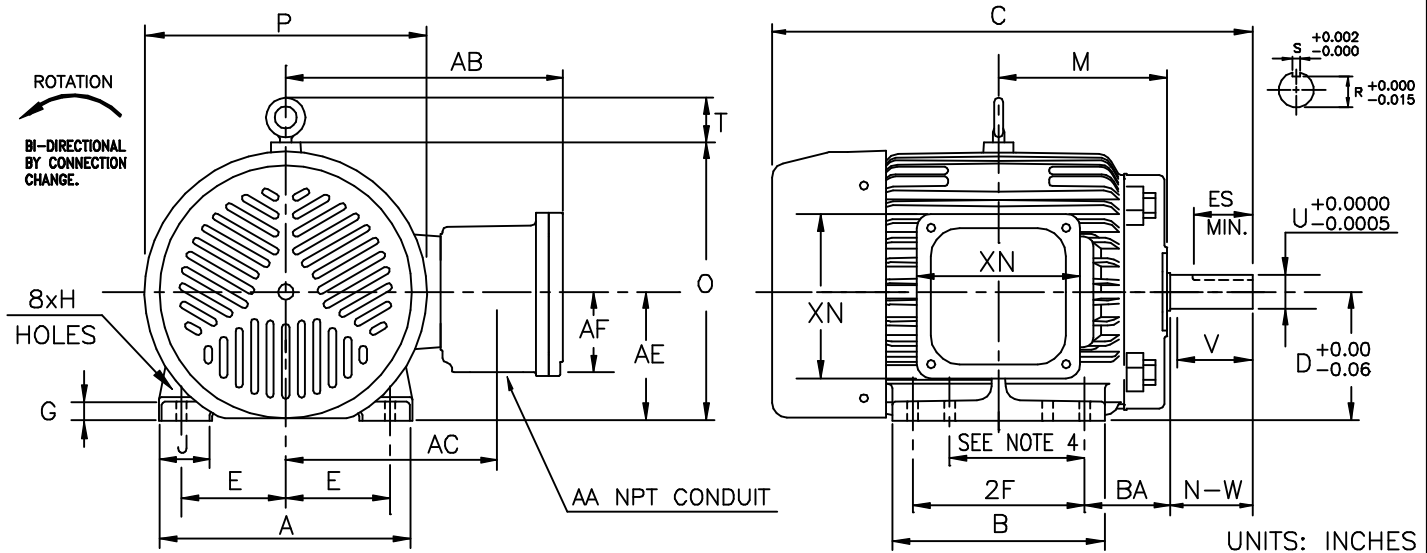

FRAME SIZE	MOUNTING				CONDUIT BOX						
	E	2F	H	BA	AA	AB	AC	AE	AF	XL	XN
213T	4.25	5.50	0.44	3.50	1.00	11.3	8.6	5.25	3.3	6.7	6.7
215T	4.25	7.00	0.44	3.50	1.00	11.3	8.6	5.25	3.3	6.7	6.7

FRAME SIZE	MOTOR DIMENSIONS									
	A	B	C	D	G	J	M	O	P	T
213T/215T	10.3	8.7	19.8	5.25	0.8	2.2	6.3	11.1	11.5	1.8

FRAME SIZE	SHAFT EXTENSION			KEY SEAT			BEARINGS		MAXIMUM WEIGHT
	N-W	V	U	R	S	ES	LS	OS	
213T/215T	3.38	3.28	1.375	1.201	0.312	2.41	6308UU	6308UU	202 lbs.

NOTES:

1. DIMENSION V REPRESENTS LENGTH OF STRAIGHT PART OF SHAFT
2. CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS AND MAY BE MOUNTED ON OPPOSITE SIDE ON SPECIAL ORDER.
3. KEY DIMENSIONS EQUAL S x S x 2.38 (MOTOR SUPPLIED WITH KEY)
4. DIMENSIONS FOR 213T MOUNTING EQUAL (2F) LOCATED IN 213T SIDE VIEW.
5. MOTOR WEIGHT SHOWN IS MAXIMUM HORSEPOWER IN FRAME.

ALL DATA SUBJECT TO CHANGE WITHOUT NOTICE.
FOR CONSTRUCTION USE ONLY CERTIFIED DATA.

CERTIFIED DATA

CUSTOMER: _____ P.O. NO.: _____ TAG NO.: _____

MOTOR MODEL NO.: _____ TOSHIBA FILE NO.: _____

HP: _____ RPM (SYN.): _____ VOLTAGE: _____ Hz: _____

FRAME SIZE: _____ LOG NO.: _____ LOG REV. LEVEL: _____

REMARKS: _____

PER: _____ ISSUE DATE: _____ SUPERSEDES: _____

SL004103