


|            |          |
|------------|----------|
| INDEX      | OL-32062 |
| REV. LEVEL | 0        |
| SHEET      | 1 OF 1   |

*TOSHIBA/HOUSTON*

TOTALLY-ENCLOSED FAN-COOLED  
HORIZONTAL FOOT-MOUNTED  
QUARRY-DUTY (C.I. T-BOX)

Fr. 324T-326T

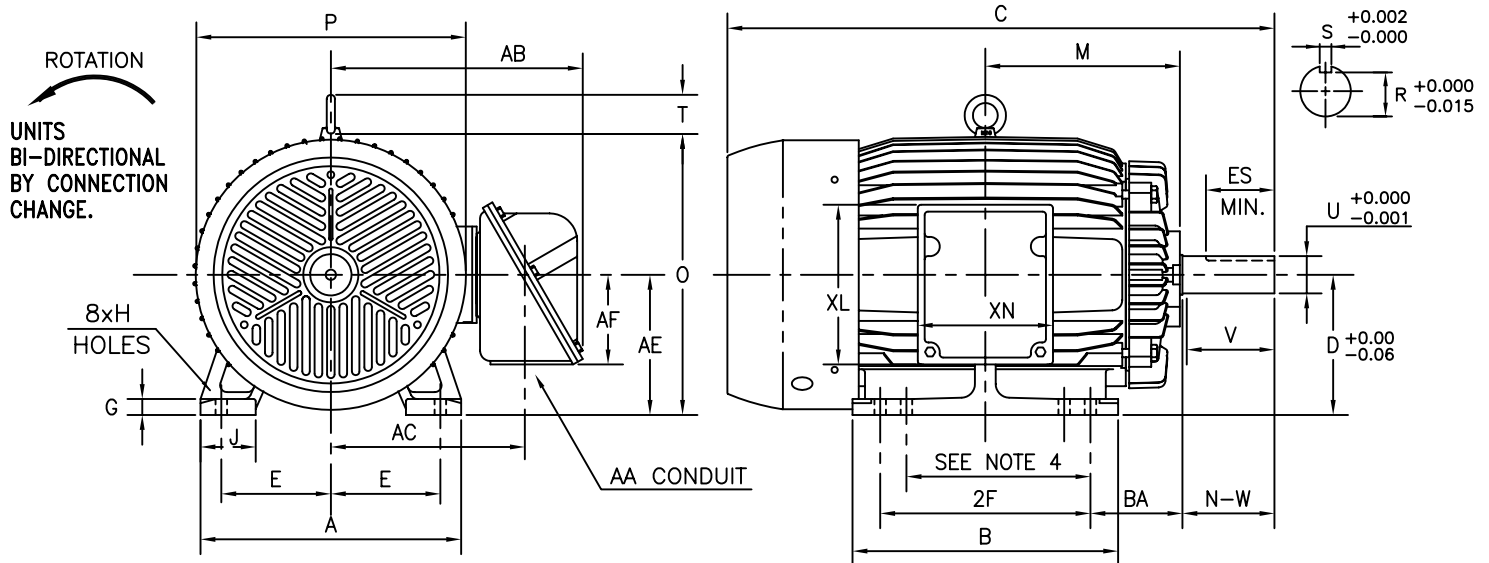

UNITS: INCHES

| FRAME SIZE | MOUNTING |       |      |      | CONDUIT BOX |      |      |     |     |     |     |
|------------|----------|-------|------|------|-------------|------|------|-----|-----|-----|-----|
|            | E        | 2F    | H    | BA   | AA          | AB   | AC   | AE  | AF  | XL  | XN  |
| 324T       | 6.25     | 10.50 | 0.66 | 5.25 | 2.00        | 14.4 | 11.1 | 8.0 | 5.1 | 9.1 | 7.7 |
| 326T       | 6.25     | 12.00 | 0.66 | 5.25 | 2.00        | 14.4 | 11.1 | 8.0 | 5.1 | 9.1 | 7.7 |

| FRAME SIZE | MOTOR DIMENSIONS |      |      |      |     |     |      |      |      |     |
|------------|------------------|------|------|------|-----|-----|------|------|------|-----|
|            | A                | B    | C    | D    | G   | J   | M    | O    | P    | T   |
| 324T/326T  | 14.9             | 15.2 | 31.2 | 8.00 | 0.9 | 3.2 | 11.1 | 15.7 | 15.4 | 2.4 |

| FRAME SIZE | SHAFT EXTENSION |      |       | KEY SEAT |       |      | BEARINGS |          | MAXIMUM WEIGHT |
|------------|-----------------|------|-------|----------|-------|------|----------|----------|----------------|
|            | N-W             | V    | U     | R        | S     | ES   | LS       | OS       |                |
| 324T/326T  | 5.25            | 5.00 | 2.125 | 1.845    | 0.500 | 3.91 | 6312C3   | 6312ZZC3 | 650 lbs.       |

ALL DATA SUBJECT TO CHANGE WITHOUT NOTICE.  
FOR CONSTRUCTION USE ONLY CERTIFIED DATA.

NOTES:

1. DIMENSION V REPRESENTS LENGTH OF STRAIGHT PART OF SHAFT.
2. CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS AND MAY BE MOUNTED ON OPPOSITE SIDE ON SPECIAL ORDER.
3. "T" KEY DIMENSIONS EQUAL S x S x 3.88  
"TS" KEY DIMENSIONS EQUAL S x S x 2.00 (MOTOR SUPPLIED WITH KEY)
4. DIMENSIONS FOR 324T MOUNTING EQUAL (2F) LOCATED IN 324T SIDE VIEW.
5. MOTOR WEIGHT SHOWN IS MAXIMUM HORSEPOWER IN FRAME.

CERTIFIED DATA

CUSTOMER: \_\_\_\_\_ P.O. NO.: \_\_\_\_\_ TAG NO.: \_\_\_\_\_

MOTOR MODEL NO.: \_\_\_\_\_ TOSHIBA FILE NO.: \_\_\_\_\_

HP: \_\_\_\_\_ RPM (SYN.): \_\_\_\_\_ VOLTAGE: \_\_\_\_\_ Hz: \_\_\_\_\_

FRAME SIZE: \_\_\_\_\_ LOG NO.: \_\_\_\_\_ LOG REV. LEVEL: \_\_\_\_\_

REMARKS: \_\_\_\_\_

PER: \_\_\_\_\_ ISSUE DATE: \_\_\_\_\_ SUPERSEDES: \_\_\_\_\_