


INDEX	SAS000911
REV. LEVEL	1
SHEET	1 OF 1

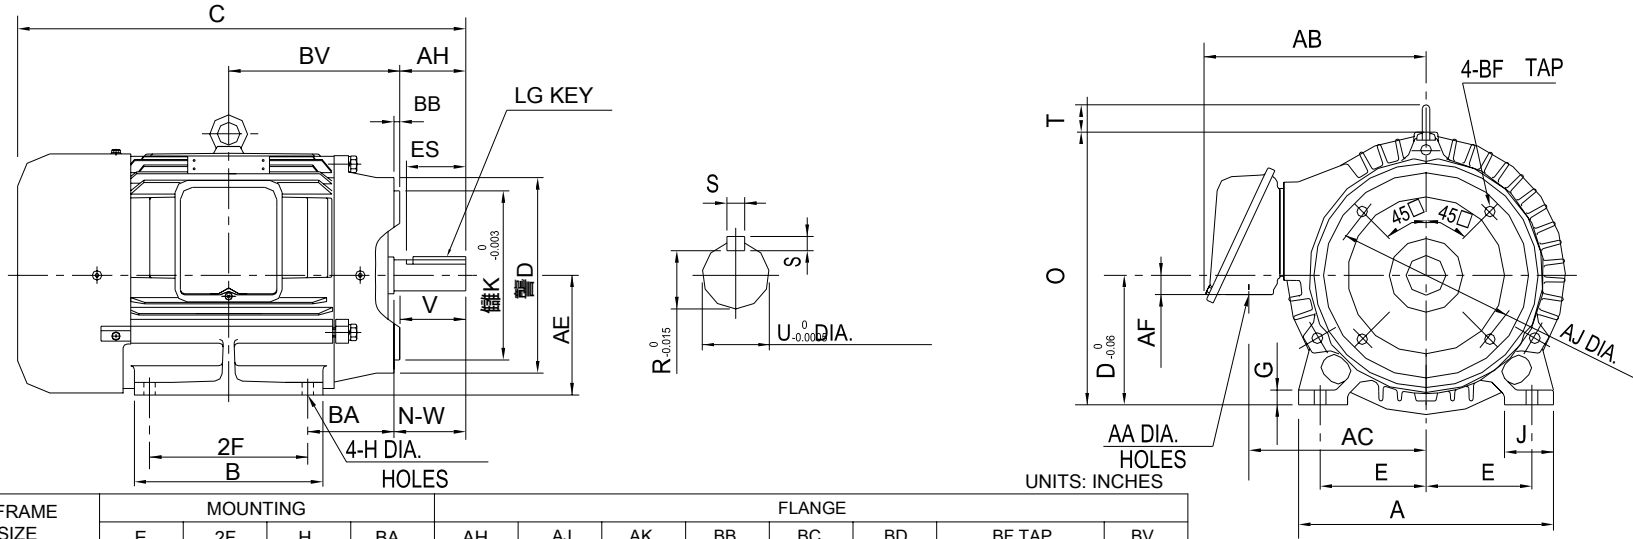

FRAME SIZE	MOUNTING				FLANGE							
	E	2F	H	BA	AH	AJ	AK	BB	BC	BD	BF TAP	BV
213T	4.25	5.50	0.41	3.50	3.12	7.250	8.500	0.25	—	9.00	1/2"-13UNC	6.51
215T	4.25	7.00	0.41	3.50	3.12	7.250	8.500	0.25	—	9.00	1/2"-13UNC	7.26

FRAME SIZE	MOTOR DIMENSIONS									CONDUIT BOX						
	A	B	C	D	G	J	O	T	P	AA	AB	AC	AE	AF	XL	XN
213T	10.24	6.89	17.76	5.25	0.65	1.97	10.84	1.65	—	1.38	9.29	—	5.25	2.61	—	—
215T	10.24	8.39	19.26	5.25	0.65	1.97	10.84	1.65	—	1.38	9.29	—	5.25	2.61	—	—

FRAME SIZE	SHAFT EXTENSION			KEY SEAT			BEARINGS		MAXIMUM WEIGHT
	N-W	V	U	R	S	ES	LS	OS	
213T/215T	3.38	3.12	1.375	1.201	0.312	2.41	6308ZZ	6208ZZ	180 lbs.

- NOTES:
1. DIMENSION V REPRESENTS LENGTH OF STRAIGHT PART OF SHAFT
 2. CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS AND MAY BE MOUNTED ON OPPOSITE SIDE ON SPECIAL ORDER.
 3. KEY DIMENSIONS EQUAL S x S x 2.41 (MOTOR SUPPLIED WITH KEY)
 4. MOTOR WEIGHT SHOWN IS MAXIMUM HORSEPOWER IN FRAME.

ALL DATA SUBJECT TO CHANGE WITHOUT NOTICE FOR CONSTRUCTION USE ONLY CERTIFIED DATA

CERTIFIED DATA

CUSTOMER: _____ P.O. NO.: _____ TAG NO.: _____
 MOTOR MODEL NO.: _____ TOSHIBA FILE NO.: _____
 HP: _____ RPM (SYN.): _____ VOLTAGE: _____ Hz: _____
 FRAME SIZE: _____ LOG NO.: _____ LOG REV. LEVEL: _____
 REMARKS: _____
 PER: _____ ISSUE DATE: _____ SUPERSEDES: _____

TOSHIBA/HOUSTON
 TOTALLY-ENCLOSED
 FAN-COOLED
 FOOT-MOUNTED
 WITH C-FACE FLANGE
 Fr. 213T-215T